


Designed for easy Hose assembly by anyone looking to extend their product portfolio. Easyflex has a true ID and eliminates the need for deconvoluting of the hose when using standard Hydraulic tail fittings. Used in applications where constant flexing, high temperature and/ or chemical resistance is paramount. Easyflex offers a cost effective solution over the full life of the hose.

A full range of ferrules is available from Lantech Solutions for Easyflex hose.

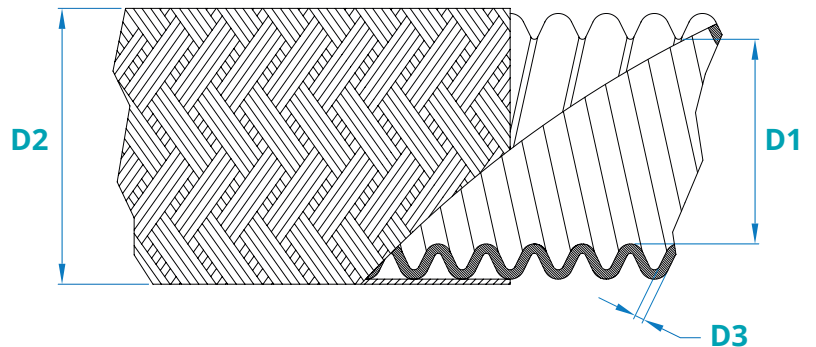

PROPERTIES

APPLICATION	Used globally in low to medium pressure premium applications that require more flexibility or tighter bend radius whilst still needing the high temperature and impeccable chemical resistance of the Lantech hose.		
DESIGN	Helically Convoluted Lantech tube with SS 304 Braid		
INNER LAYER	Helically convoluted Lantech tube		
OUTER LAYER	SS 304 Braid		
TEMP MIN	-60°C	TEMP MAX	+260°C
MATERIAL	Lantech according to "ISO12086, Part1. PTFE-E.P.D.M 1.61.C.E.4_12"		

Part No Natural	Part No Antistatic	Size	D1 ID Nominal (mm)	D2 Wall Thickness (mm)	D3 OD Nominal (mm)	Minimum Bend Radius (mm)	MWP (Bar)	BP (Bar) 20°C
AFX8004	AFX8904	1/4"	6.45	0.76	12.30	18	172	517
AFX8006	AFX8906	3/8"	9.50	0.76	15.25	20	138	414
AFX8008	AFX8908	1/2"	12.83	0.89	18.80	25	103	310
AFX8010	AFX8910	5/8"	15.88	0.89	22.10	51	83	248
AFX8012	AFX8912	3/4"	19.05	0.89	24.65	64	69	207
AFX8014	AFX8914	7/8"	22.35	0.89	28.70	76	57	172
AFX8016	AFX8916	1"	25.40	1.02	32.77	89	46	138
AFX8020	AFX8920	1.25"	32.20	1.02	40.72	127	34	103
AFX8024	AFX80924	1.5"	38.10	1.02	48.25	152	30	90
AFX8032	AFX8932	2"	50.40	1.02	60.50	201	23	69