


Lightweight hose with excellent capabilities including high Maximum Working Pressures and short Bend Radius.

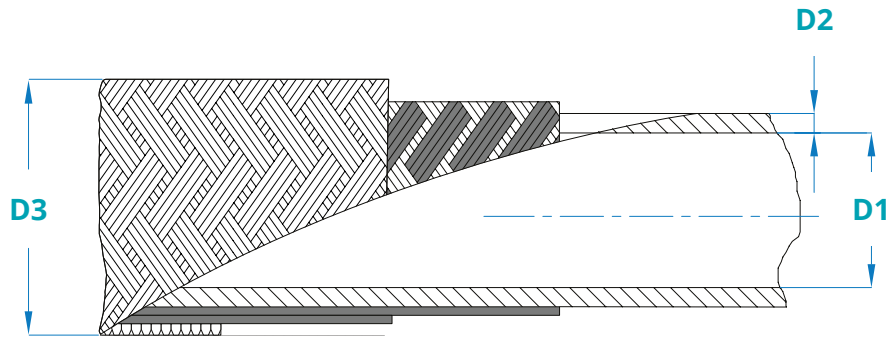

## PROPERTIES

<b>APPLICATION</b>	High Pressure Gas and Fluid applications		
<b>DESIGN</b>	Smoothbore Gas quality Lantech tube with an Aramid Braid and SS 304 Braid (can also be manufactured with a Hytrel cover)		
<b>INNER LAYER</b>	Gas Quality, heavy wall Smoothbore Lantech tube		
<b>OUTER LAYER</b>	Aramid Braid and High Tensile SS 304 Braid		
<b>TEMP MIN</b>	-60°C	<b>TEMP MAX</b>	+260°C
<b>MATERIAL</b>	TFE according to "ISO12086, Part1. Lantech-E.P.D.M 1.61.C.E.4_12"		

Part No Natural	Part No Antistatic	Size	D1 ID Nominal (mm)	D2 Wall Thickness (mm)	D3 OD Nominal (mm)	Minimum Bend Radius (mm)	MWP (Bar)	BP (Bar) 20°C
6304	N/A	1/4"	6.50	1.02	10.15	76	552	1655
6307	N/A	3/8"	10.00	1.02	14.35	127	310	1240